AD-A120 985 A CUSP-LIKE FREE-SURFACE FLOW DUE TO A SUBMERGED SOURCE
OR SINK(U) WISCONSIN UNIV-MADISON MATHEMATICS RESEARCH
CENTER E O TUCK ET AL. SEP 82 MRC-TSR-2418
F/G 20/4 NL

UNCLASSIFIED DAAG29-80-C-0041

END
DATE
FILMED
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

2

AD A120985

MRC Technical Summary Report #2418

A CUSP-LIKE FREE-SURFACE FLOW DUE TO A SUBMERGED SOURCE OR SINK

E. O. Tuck and J.-M. Vanden-Broeck

Mathematics Research Center
University of Wisconsin—Madison
610 Walnut Street
Madison, Wisconsin 53706

September 1982

(Received July 27, 1982)

Approved for public release
Distribution unlimited

Sponsored by

U. S. Army Research Office
P. O. Box 12211
Research Triangle Park
North Carolina 27709

National Science Foundation
Washington, D. C. 20550

UNIVERSITY OF WISCONSIN-MADISON
MATHEMATICS RESEARCH CENTER

A CUSP-LIKE FREE-SURFACE FLOW DUE TO A SUBMERGED SOURCE OR SINK

E. O. Tuck* and J.-M. Vanden-Broeck**

Technical Summary Report #2418
September 1982

ABSTRACT

A solution is found for a line source or sink beneath a free surface, at a unique squared Froude number of 12.622.

AMS(MOS) Subject Classification: 76B10.

Key Words: Free-surface flow, source.

Work Unit Number 2 - Physical Mathematics.

* Applied Mathematics Department, University of Adelaide, S.A. 5000. Australia.

** Mathematics Department, University of Wisconsin, Madison, WI 53706.

** Sponsored by the United States Army under contract No. DAAG29-80-C-0041. This material is based upon work supported by the National Science Foundation under Grant No. MCS-7927062, Mod. 1. and No. MCS-8001960.

SIGNIFICANCE AND EXPLANATION

We consider the steady flow induced by a line source placed at a given depth beneath the undisturbed level of a free-surface. We assume that the flow 'bifurcates' at a definite point somewhere between the source and the undisturbed free-surface level. The free-surface at this point is cusp-like, the tip of the cusp pointing toward the source. The model is motivated by hydraulic problems of water entry or extraction from a reservoir. The problem is solved numerically by collocation. A unique solution is obtained whose cusp lies at 74.938% of the depth of the source.

The responsibility for the wording and views expressed in this descriptive summary lies with MRC, and not with the authors of this report.

A COMB-LIKE FREE-SURFACE FLOW DUE TO A SUBMERGED SOURCE OR SINK

E. O. Tuck* and J.-M. Vanden Broeck**

1. Introduction

What is the flow induced by an isolated steady source or sink beneath a free surface? This simple question does not appear to have a simple answer. If the source is a line source of strength m, in two-dimensional irrotational flow of an incompressible inviscid fluid of infinite depth, and is situated at submergence h beneath the undisturbed level of the free surface under gravity g, then there is only one dimensionless parameter, the (squared) Froude number

$$F^2 = m^2/(gh^3) \tag{1.1}$$

and we might expect to find a solution for every value of F^2.

In fact, the problem cannot be solved without further specification of the nature of the free-surface disturbance immediately above the source. Some previous investigators [2], [3] have assumed a stagnation point, and have sought results for small values of F^2. Further studies of this type of flow have been made recently by the present authors, and will be reported elsewhere. A feature of these stagnation-point solutions is the presence of short waves, which steepen as F^2 increases, and these solutions seem to be confined to $F^2 < 4$.

---

* Applied Mathematics Department, University of Adelaide, S.A. 5000. Australia.

** Mathematics Department, University of Wisconsin, Madison, WI 53706.

** Sponsored by the United States Army under Contract No. DAAG29-80-C-0041. This material is based upon work supported by the National Science Foundation under Grant No. MCS-7927062, Mod. 1. and No. MCS-8001960.

In the present note, we investigate a quite different type of flow topology, in which there is no stagnation point anywhere in the flow domain. Instead, the flow 'bifurcates' at a definite point somewhere between the source and the undisturbed free-surface level. The free surface at this point is cusp-like, the tip of the cusp pointing toward the source. Similar topologies have been assumed in studies of stratified fluids of finite depth, surveyed by Imberger [1].

The problem is first given a mathematical formulation in which the task is reduced to that of finding a set of real coefficients b_j of an infinite series. These coefficients are required to be such that the free-surface pressure be equal to atmospheric. If the series is truncated to a finite number of terms, and the free-surface condition enforced at a finite number of points, a set of non-linear algebraic equations can be written down, that in principle enable determination of b_j for any input Froude number.

However, no such solutions appear to be obtainable for a general input Froude number. Instead, we find that the cusp-like solution can be obtained only if (in effect) the Froude number is also included as one of the unknowns of the problem. A numerical procedure with such a feature converged rapidly to the solution shown in Figure 1, whose Froude number is $F^2 = 12.622$, and whose cusp lies at 74.93% of the depth of the source.

<u>Figure 1</u>

Free-surface shape for flow at $F^2 = 12.622$. The source is at $y = -1.84257$, and the free-surface cusp is at $y = -1.38879$, on the scale of this figure.

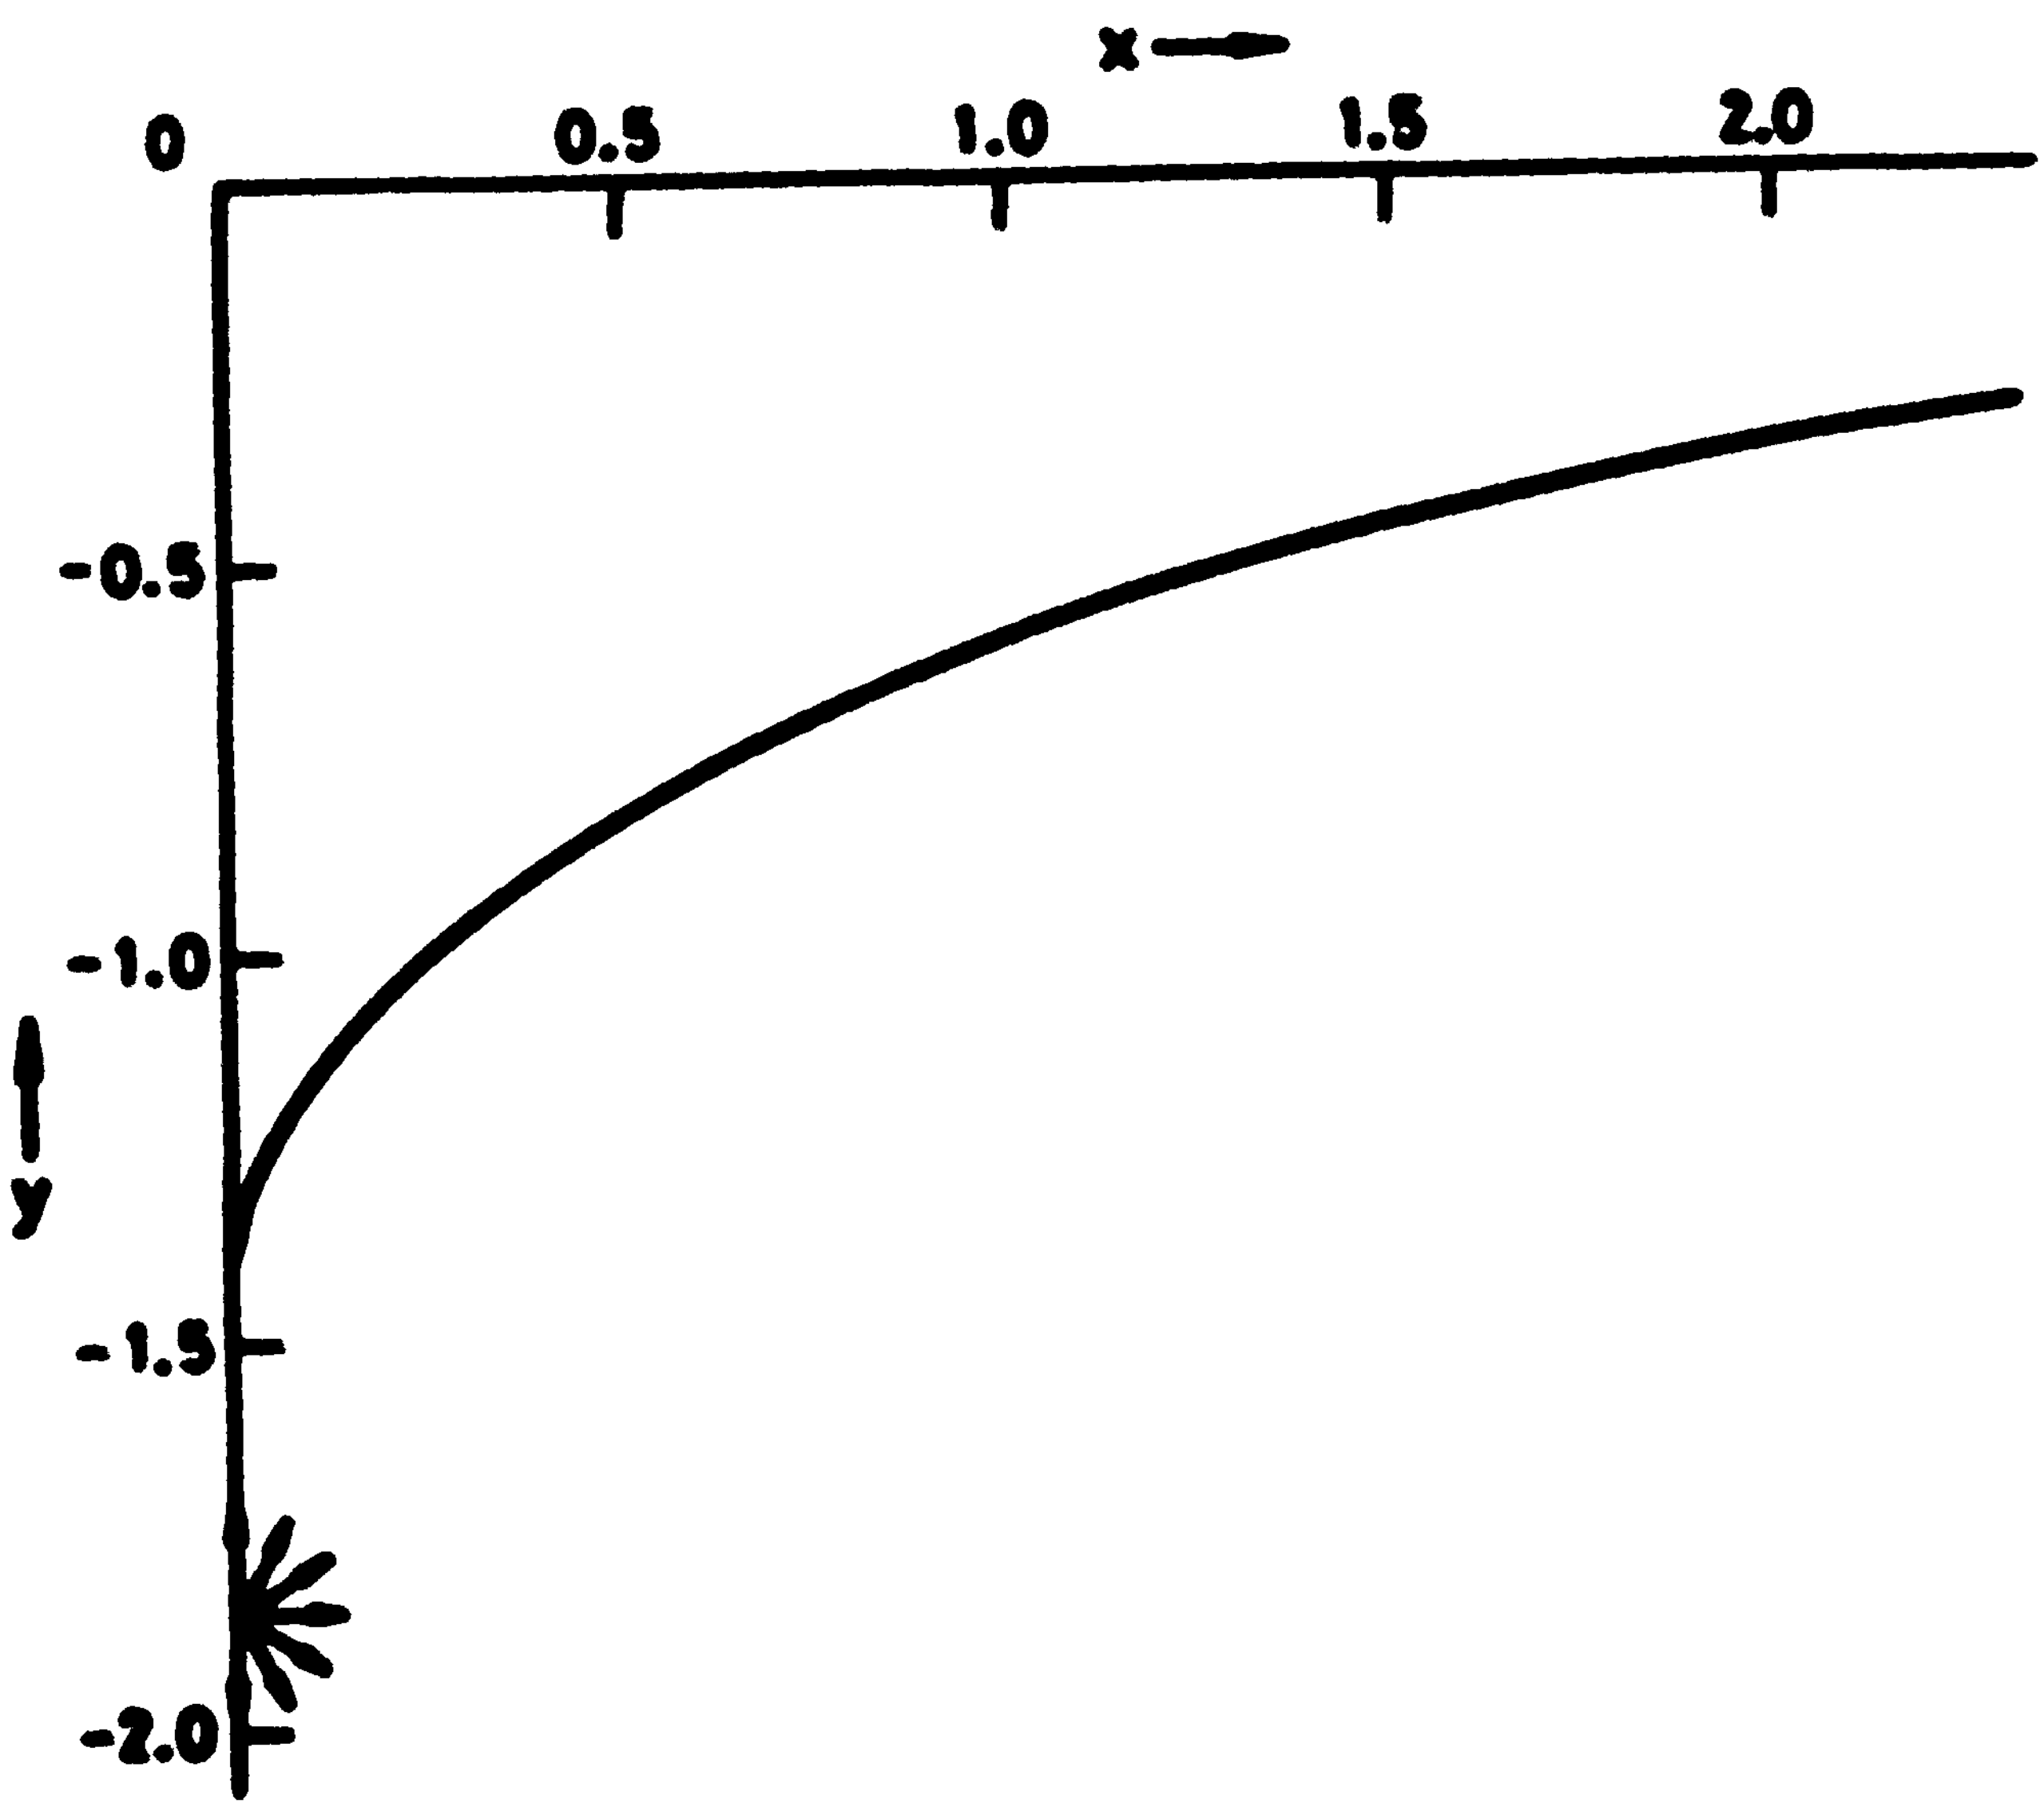

2. Mathematical Formulation

If $f(z) = \phi(x,y) + i\psi(x,y)$ is a complex velocity potential, and a new complex variable t is defined by

$$e^{f} = 4t(t+1)^{-2}, \qquad (2.1)$$

we represent the physical variable $z = x+iy$ as a series in powers of t, of the form

$$z(t) = i\,\frac{1}{1+t}\sum_{n=0}^{\infty} a_n t^n, \qquad (2.2)$$

for some real coefficients a_n to be determined. The suitability of such a series follows [3] from conformal-mapping considerations. Figure 2 shows the flow region in the z, f, and t-planes.

The series (2.2) has been designed to satisfy automatically all requirements except for the free-surface condition. Thus, as $t \to 0$, $z \to ih_0$ and $|f| \to \infty$, with

$$f \approx \log(z-ih_0), \quad z \to ih_0. \qquad (2.3)$$

That is, the origin $t=0$ corresponds to a source of strength 2π located at the point $z = ih_0$, and is labelled as the point S in Figure 2.

Similarly, as $t \to \pm 1$, $|z|$ and $|f|$ both become infinite, with

$$f \approx 2\log t, \quad z \to \infty. \qquad (2.4)$$

Thus the total flux 2π produced by the source at $z = ih_0$ is concentrated at infinity into a half plane, appearing therefore like a source of strength 4π, at the points designated as A and B in Figure 2.

The right half $x > 0$ of the flow region maps into the t-plane as the lower half $\mathcal{I}t < 0$ of the interior of the unit

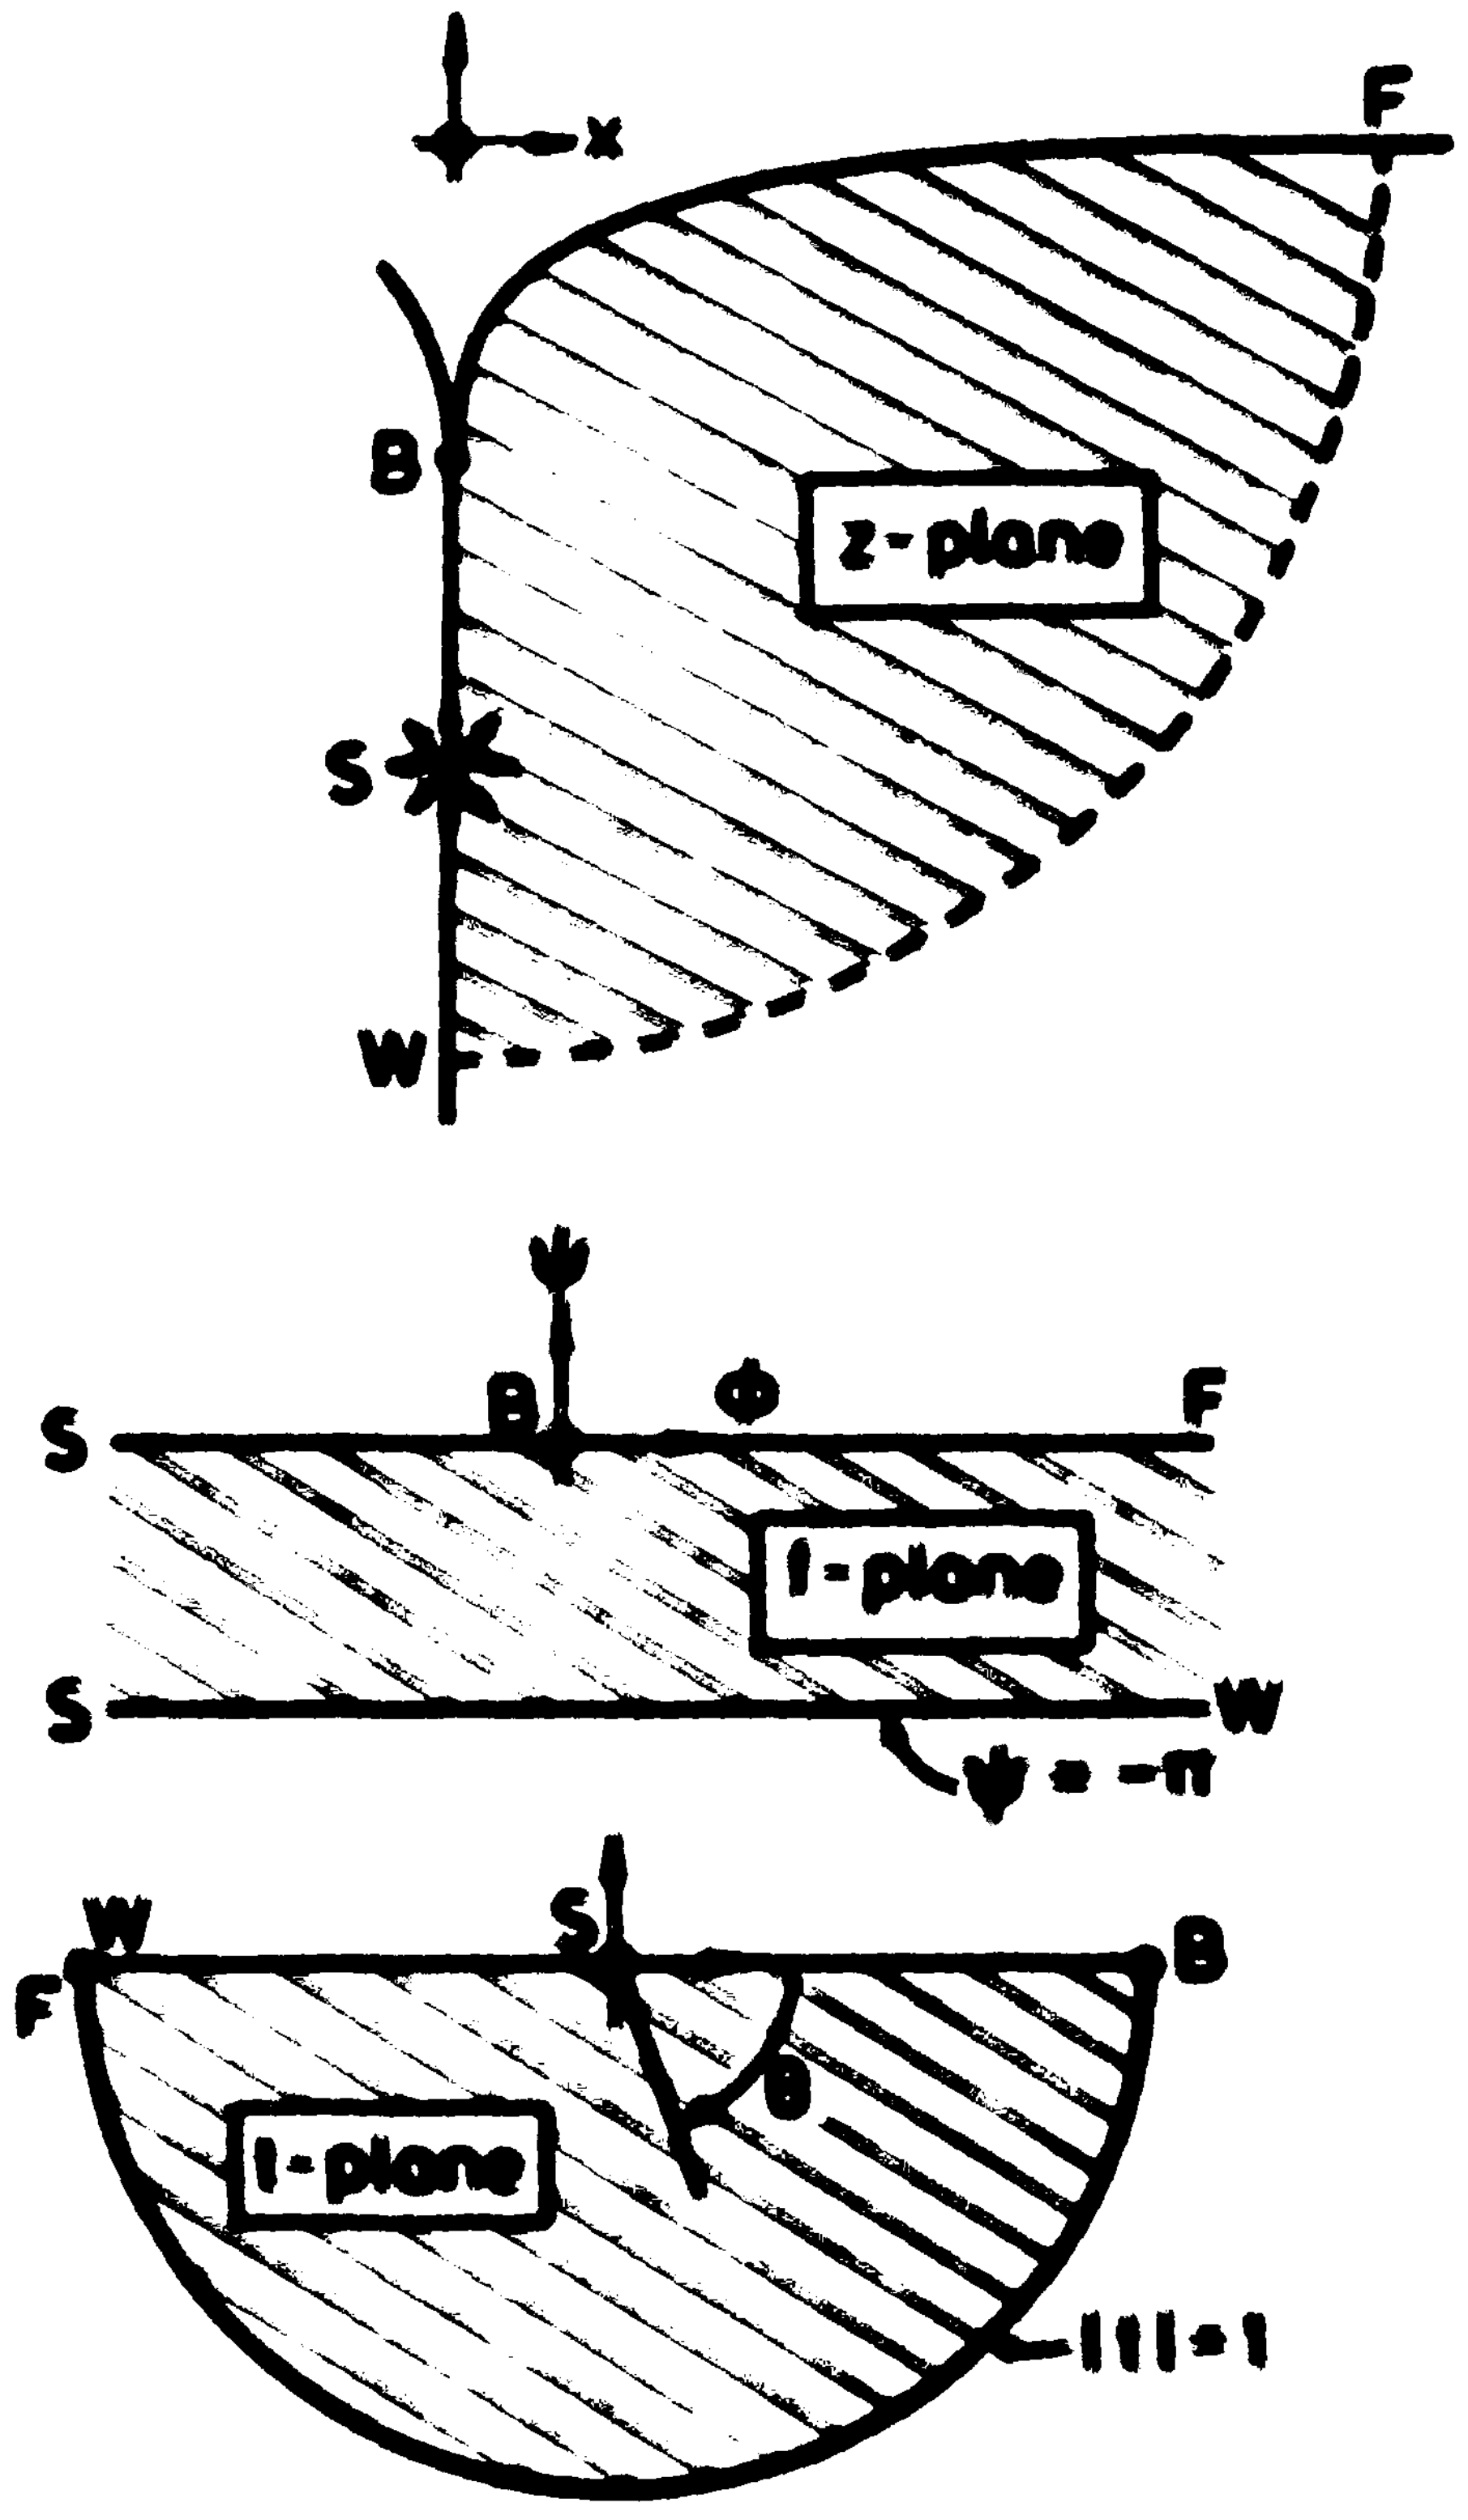

Figure 2: Flow regions in z, f and t-planes

circle $|t| < 1$, and the free surface (BF in Figure 2) is the semi-circle $t = e^{i\theta}$, $0 \leq \theta \leq \pi$. We require that, on this free surface, the pressure be equal to atmospheric, and this means that

$$y = |f'(t)|^2 + 0 \qquad (2.5)$$

Note that the above formulation is a non-dimensional one, in which we have used [illegible] as the unit of length, and [illegible] as the unit of velocity, where [illegible] is the actual (dimensional) source strength, and g the acceleration of gravity. Since the source is located at [illegible] in these dimensionless co-ordinates, if it is located at [illegible] in dimensional co-ordinates, we must have

$$[illegible] \qquad (2.6)$$

Use of the free-surface condition (2.5) [illegible] with the t variable, we have

$$[illegible] \qquad (2.7)$$

and, upon substitution of [illegible] (2.7) [illegible] (2.?), we find

$$[illegible], \quad 0 \leq \theta \leq \pi, \qquad (2.8)$$

where

$$[illegible] \qquad (2.9)$$

and

$$[illegible] \qquad (2.10)$$

$$[illegible] \qquad (2.11)$$

The problem has thus reduced to that of choosing a set of real coefficients b_n, such that a certain function P, physically identifiable with the free-surface pressure difference, vanishes for all θ in the range $0 \leq \theta \leq \pi$. This problem is not unlike that of finding Fourier coefficients, but of course is rendered much more difficult by the non-linear dependence of P on b_n.

Certain constraints on the coefficients b_n follow immediately from the end values $\theta = 0, \pi$. Thus, in order that [illegible] that the free-surface condition be satisfied at physical infinity, we must have

$$[illegible] = 0 \qquad [illegible]$$

at the other end [illegible] of the range, which corresponds to the [illegible] point [illegible]. The requirement that [illegible] [illegible]

$$\sum b_n = 0, \qquad [illegible]$$

or

$$[illegible] = 0 \qquad [illegible]$$

Thus, at $\theta = 0$ and $\theta = \pi$, [illegible] that

$$[illegible] \qquad [illegible]$$

where

$$[illegible] \qquad [illegible]$$

[illegible] coefficients [illegible]. The [illegible] [illegible] of [illegible] [illegible] [illegible] case, where [illegible] holds,

$$[illegible] \qquad [illegible]$$

[illegible] the [illegible] of the z-plane [illegible] point [illegible] in the [illegible] case, where [illegible] holds.

$$f = -\frac{1}{2}(z-z_A)/2\pi + K(z-z_A)^{3/2} + O(z-z_A)^2 \qquad (2.18)$$

(for some real constant K), which consists of a (vertical) uniform stream together with a "3/2-power" velocity potential, representing trifurcating streamlines at $z=z_A$.

3. Numerical Solution

If we force (2.8) to hold at some discrete set of values $\theta = \theta_k$, $k=1,2,\ldots,M$, with $\theta_1 > 0$ and $\theta_M < \pi$, and in addition require both (2.12) and (2.14) to hold, there results a set of $M+2$ non-linear algebraic equations involving the $N+1$ coefficients b_j, $j=0,1,2,\ldots,N$. Various numerical methods can be used to solve this set of equations, but first we must decide just how many of the coefficients are to be considered as unknown.

If the Froude number F is prescribed, then (2.6) determines the leading coefficient b_0. In principle, it is then possible to treat $b_1, b_2, \ldots, b_N$ as a set of N unknowns. However, all attempts to solve this system with input b_0 failed. There was some indication that with $1.8 < b_0 < 1.9$, success was near, and it was then suspected that a solution might exist only for some *special* Froude number, corresponding to a b_0 value in this range. Therefore, the numerical procedures were modified to allow b_0 to be an unknown rather than an input quantity, and the result was immediate and complete success, with rapid convergence to a solution at $b_0 = 1.84257$, i.e. $F^2 = 12.622$.

The actual method used is a Newton iteration, in which, if b_j is an approximation to the desired solution, then a better approximation is $b_j + \delta b_j$, where δb_j is obtained by solving

$$\sum_{j=0}^{N} \delta b_j \left[\frac{\partial F(\theta_k; b_i)}{\partial b_j}\right] = -F(\theta_k; b_i). \tag{3.1}$$

If we choose $M=N-1$, (3.1) can be solved subject to the linear constraints (2.12), (2.14) by any standard linear-equation package. It is not difficult to obtain an explicit formula for the matrix

element $\partial P/\partial b_j$ by differentiation of (2.8)-(2.11). Uniformly spaced θ_k were found to be satisfactory.

The iteration process can be started with guessed values such as $b_0=1.8$, $b_1=0.5$, $b_2=0.6$, $b_3=-0.1$, and all other coefficients zero. In practice it was found convenient to start with a low value (say 5) for N, and, once the iteration converged at that N, to use the resulting coefficients as a starting guess for iterations at a higher value of N. Convergence is very rapid at any fixed N, no more than 5 iterations being ever needed to reduce the maximum value of $P(\theta_k;b_j)$ below 10^{-5}.

Table 1 shows values of b_0 from a run in which N was successively increased in steps of 5. The final value $b_0=1.84257$ at $N=25$ is accurate to at least 5 figures. Table 2 shows the coefficients b_j, $j=0,1,2,\ldots,10$. The free surface is shown in Figure 1. All computations were carried out on a TRS-80 microcomputer.

TABLE 1

N	b_0
5	1.86935
10	1.84223
15	1.84260
20	1.84256
25	1.84257

TABLE 2

j	b_j
0	1.84257
1	0.41325
2	0.55982
3	-0.06731
4	0.01766
5	-0.00613
6	0.00248
7	-0.00111
8	0.00053
9	-0.00027
10	0.00014

4. Conclusion

We have provided here both negative (failure to achieve solutions at general input b_0 values) and positive (success to high accuracy with b_0 as an *unknown*) numerical evidence that a cusp-like flow exists only for a unique Froude number, close to $F^2 = 12.622$.

Several questions are raised by this conclusion. If this cusped solution exists only at $F^2 = 12.622..$, what happens at $F^2 = 12$ or $F^2 = 13$? The present conclusion relates only to existence of a steady flow, and an obvious but hardly satisfying answer to the above question is that, if the source-like flow is started from rest, a steady state cannot be achieved if $F^2 \neq 12.622...$ But then, what happens *instead* of a steady state?

It is also notable that our present steady results are independent of the sign of m, i.e. are as valid for sinks as for sources. In practice, it seems rather more likely that a steady flow with a downward-cusped free surface could occur for a sink, than for a source. Although the steady equations are independent of the sign of m, this is not so for the corresponding unsteady equations, and it is possible that the present solutions could be stable for $m < 0$ but unstable for $m > 0$.

References

[1] J. Imberger, "Selective withdrawal: a review", *2nd International Symposium on Stratified Flows*, Trondheim, June 1980.

[2] H. Peregrine, "A line source beneath a free surface", Report No. 1248, *Mathematics Research Center*, University of Wisconsin, Madison, 1972.

[3] J.-M. Vanden Broeck, L.W. Schwartz and E.O. Tuck, "Divergent low-Froude-number series expansion of non-linear free-surface flow problems", Proc. Roy. Soc. Lond. Series A, 361 (1978) 207-224.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER: 2418
2. GOVT ACCESSION NO.: AD-A120985
3. RECIPIENT'S CATALOG NUMBER:
4. TITLE (and Subtitle): A CUSP-LIKE FREE-SURFACE FLOW DUE TO A SUBMERGED SOURCE OR SINK
5. TYPE OF REPORT & PERIOD COVERED: Summary Report - no specific reporting period
6. PERFORMING ORG. REPORT NUMBER:
7. AUTHOR(s): E. O. Tuck and J.-M. Vanden-Broeck
8. CONTRACT OR GRANT NUMBER(s): DAAG29-80-C-0041, MCS-7927062, Mod. 1, and MCS-8001960
9. PERFORMING ORGANIZATION NAME AND ADDRESS: Mathematics Research Center, University of Wisconsin, 610 Walnut Street, Madison, Wisconsin 53706
10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS: Work Unit Number 2 - Physical Mathematics
11. CONTROLLING OFFICE NAME AND ADDRESS: *see below
12. REPORT DATE: September 1982
13. NUMBER OF PAGES: 13
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office):
15. SECURITY CLASS. (of this report): UNCLASSIFIED
15a. DECLASSIFICATION/DOWNGRADING SCHEDULE:
16. DISTRIBUTION STATEMENT (of this Report): Approved for public release; distribution unlimited.
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report):
18. SUPPLEMENTARY NOTES:

U. S. Army Research Office
P. O. Box 12211
Research Triangle Park
North Carolina 27709

National Science Foundation
Washington, D. C. 20550

19. KEY WORDS (Continue on reverse side if necessary and identify by block number): Free-surface flow, source.

20. ABSTRACT (Continue on reverse side if necessary and identify by block number):

A solution is found for a line source or sink beneath a free surface, at a unique squared Froude number of 12.622.

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

LME

-8